


DRAWING NO. C840AMXSXXX	REV H	Customer Drawing	REVISION HISTORY			
			REV	DESCRIPTION (ECO)	DATE	APPROVED
			G	UPDATE PULL TEB TO MOLDED THROUGH ECO 11806	8/12/2022	SR
			H	REMOVE FERRULE AND HEAT SHRINK TUBING ECO12301	8/31/2023	SR

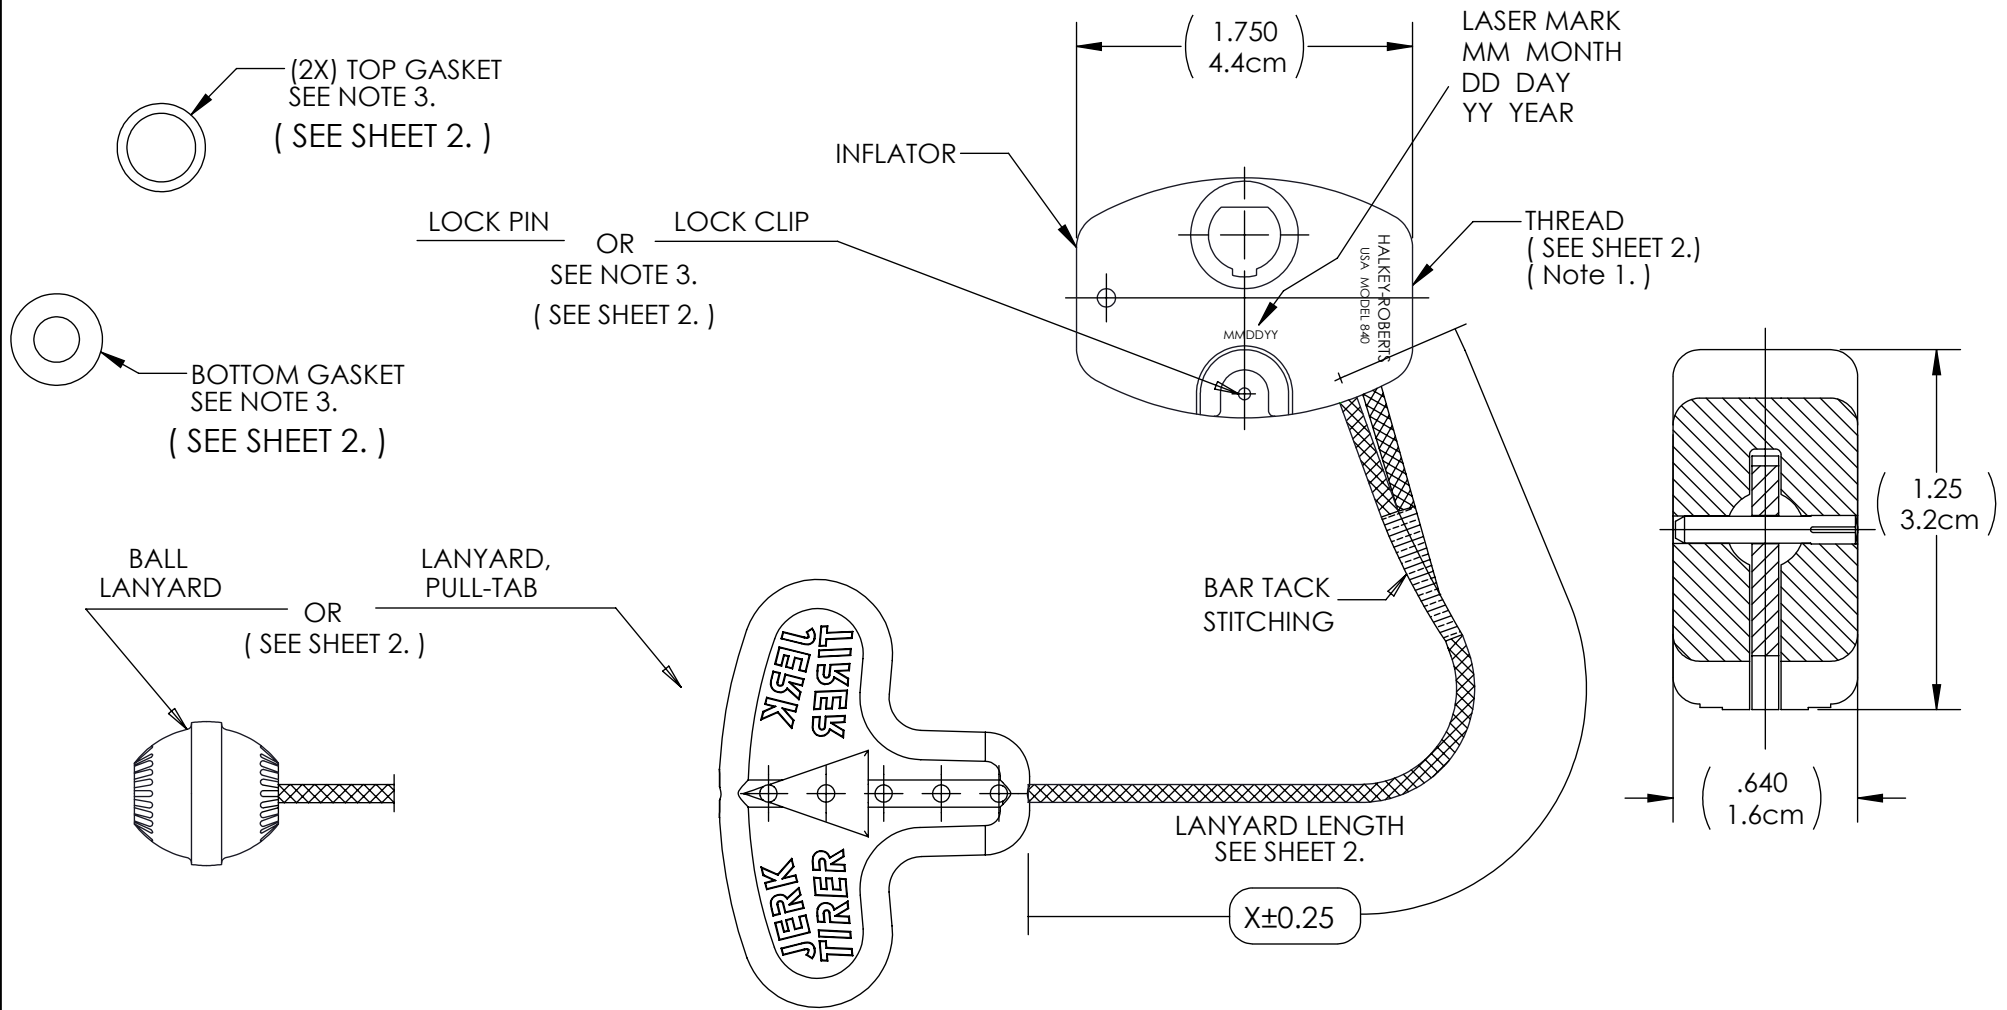

NOTES:
SEE SHEET 2.

MOLDED PARTS: GATES, PARTING LINES, AND FLASH PER QUALITY CRITERIA PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS SOLE PROPERTY OF HALKEY-ROBERTS CORPORATION ST. PETERSBURG, FL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HALKEY-ROBERTS CORPORATION IS PROHIBITED.	DRAWN BY M.S. DATE 01/28/2000	HR® Halkey-Roberts®	
	APPROVED BY J.W. DATE 01/28/2000		
	MATERIAL N/A FINISH N/A	TITLE MANUAL INFLATOR ST'L STEEL	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ± 1° TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005	THIRD ANGLE PROJECTION 	SIZE A SCALE 1:1 DRAWING NO. C840AMXSXXX DO NOT SCALE DRAWING REV H SHEET 1 OF 2

PART NO. 840AMXSXXX

FIRST SUFFIX "X" INDICATES:

NONE - 3/8" TH'D

L - 1/2" TH'D

SECOND SUFFIX "X" INDICATES: (SEE TABLE BELOW).

NONE - NO BALL OR PULL-TAB

COLOR		DESCRIPTION
RED	YELLOW	
B	YB	BALL
2B	Y2B	2 BALLS
3B	Y3B	3 BALLS
E	YE	ENGLISH TAB
D	YD	DANISH-ENGLISH TAB
F	YF	FRENCH -ENGLISH TAB
G	YG	GERMAN-ENGLISH TAB
I	YI	ITALIAN-ENGLISH TAB
J	YJ	JAPANESE-ENGLISH TAB
S	YS	SPANISH-ENGLISH TAB

FOURTH SUFFIX "X" INDICATES: X - CORD LENGTH (SEE TABLE)

4TH SUFFIX	X - CORD Lg.	
	Inches	Centimeters
3	3.0	7.6
4	4.0	10.2
5	5.0	12.7
55	5.5	14.0
6	6.0	15.2
7	7.0	17.8
8	8.0	20.3
9	9.0	22.9
100	10.0	25.4
115	11.5	29.2
120	12.0	30.5
125	12.5	31.75
130	13.0	33.0
140	14.0	35.6
260	26.0	66.0

NOTES:

1. FIRST SUFFIX "X" INDICATES: THREAD
NONE - 3/8" TH'D
L - 1/2" TH'D'

2. SECOND SUFFIX "X" INDICATES:
BALL OR LANYARD. SEE TABLE:

3. THIRD SUFFIX "X" INDICATES:
P - LOCK PIN
C - CLIP

4. FOURTH SUFFIX "X" INDICATES: X - CORD LENGTH (SEE TABLE)

5. CRITICAL DIMENSIONS ARE CIRCLED AND SUBJECT TO INSPECTION.

6. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY.

7. ALL DIMENSIONS ARE IN INCHES WITH NOMINAL DIMENSIONS IN METRIC.

LOCK CLIP OR PIN:
TOP & BOTTOM
GASKETS PACKED SEPERATELY.

DRAWN BY M.S. DATE 01/28/2000		HR® Halkey-Roberts®	
APPROVED BY J.W. DATE 01/28/2000			
MATERIAL N/A		TITLE	
FINISH N/A		MANUAL INFLATOR ST'L STEEL	
MOLDED PARTS: <small>GATES, PARTING LINES, AND FLASH PER QUALITY CRITERIA</small> PROPRIETARY AND CONFIDENTIAL <small>THE INFORMATION CONTAINED IN THIS DRAWING IS SOLE PROPERTY OF HALKEY-ROBERTS CORPORATION ST. PETERSBURG, FL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HALKEY-ROBERTS CORPORATION IS PROHIBITED.</small>		SIZE A DRAWING NO. C840AMXSXXX REV H SCALE 1:1 SHEET 2 OF 2	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ± 1° TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005		THIRD ANGLE PROJECTION 	